

FSL

POMPE AD INGRANAGGI
GEAR PUMPS



DIN 5462 SE

CODICE DI ORDINAZIONE / ORDERING CODE


200 FSL XXX X S

200 | **FSL** | **XXX** | **X** | **S**

TIPO / TYPE
POMPA AD INGRANAGGI / GEAR PUMP

CILINDRATA / DISPLACEMENT

DIN 5462 SE
ROTAZIONE / ROTATION
D = DESTRO / CLOCKWISE
S = SINISTRO / ANTICLOCKWISE

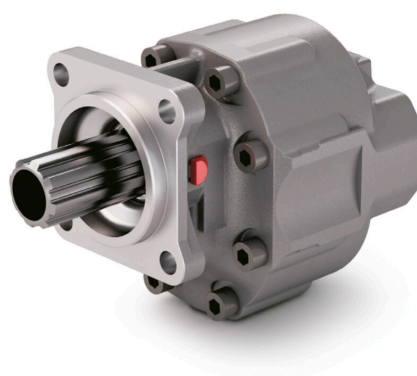

SCANIA

ALBERO USCITA NON SUPPORTATO
OUTPUT SHAFT NOT SUPPORTED




FSL 57

FSL 65

FSL 90

TYPE	CODE	DISPLACEMENT cm ³	B mm	C INLET	D OUTLET	WEIGHT kg
FSL 57	200FSL057DS 200FSL057SS	57	173,5	1	3/4	12,2
FSL 65	200FSL065DS 200FSL065SS	65	178,5	1	3/4	12,6
FSL 90	200FSL090DS 200FSL090SS	84	193,5	1-1/4	1	13,9

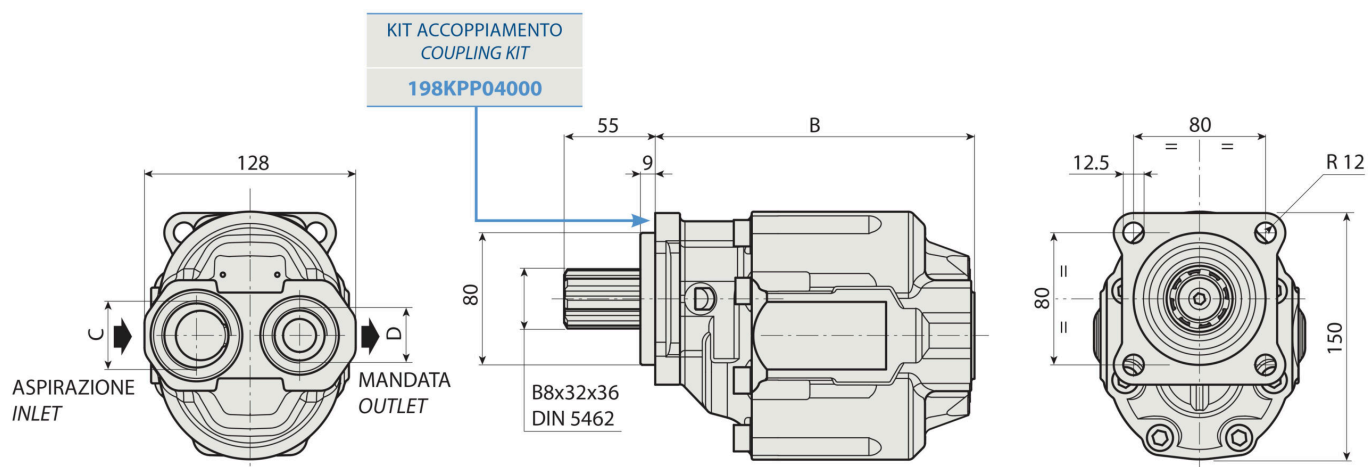

TYPE	CODE	DISPLACEMENT cm ³	MAX CONTINUOUS OPERATING PRESSURE bar	MAX INTERMITT. OPERATING PRESSURE (MAX 30S) bar	MAX PEAK PRESSURE (P<= 0.1S) bar	MAX INTERMITTENT SPEED (P<=20 BAR) n/min r.p.m.	MAX CONTINUOUS SPEED (<=P1) n/min r.p.m.	MIN INTERMITTENT SPEED (<=P2X0.5) (MAX 30S) n/min r.p.m.
FSL 57	200FSL057DS 200FSL057SS	57	240	265	285	3500	2000	300
FSL 65	200FSL065DS 200FSL065SS	65	220	240	250	3500	1800	300
FSL 90	200FSL090DS 200FSL090SS	84	210	230	250	3500	1500	300