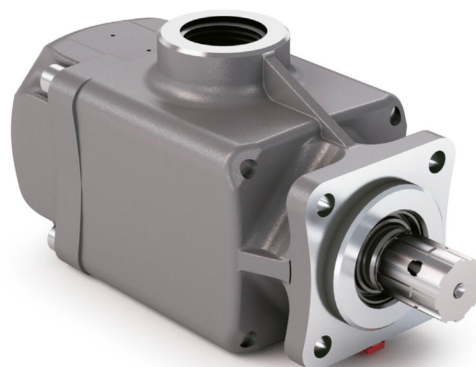


PE**POMPE A PISTONI**
PISTON PUMPS**DIN 5462 SE**


CODICE DI ORDINAZIONE / ORDERING CODE

201 PE XXX Z SE

201 PE XXX Z SE
POMPA A PISTONI / PISTON PUMP
TIPO / TYPE
CILINDRATA / DISPLACEMENT
VERSIONE / VERSION
DIN 5462 SE

**BIDIREZIONALE**
BI-ROTATIONAL**PE 70****PE 90****PE 80****PE 100****SPECIFICATIONS AND TECHNICAL DATA**

TYPE	CODE	A mm	B mm	C mm	D mm	E INLET	F OUTLET	WEIGHT kg
PE 70	201PE070ZSE	272	122,5	124	150,5	1.01.20021		17,5
PE 80	201PE080ZSE	272	122,5	124	150,5	1.01.20021		17,5
PE 90	201PE090ZSE	272	122,5	124	150,5	1.01.20021		17,5
PE 100	201PE100ZSE	272	122,5	124	150,5	1.01.20021		1735

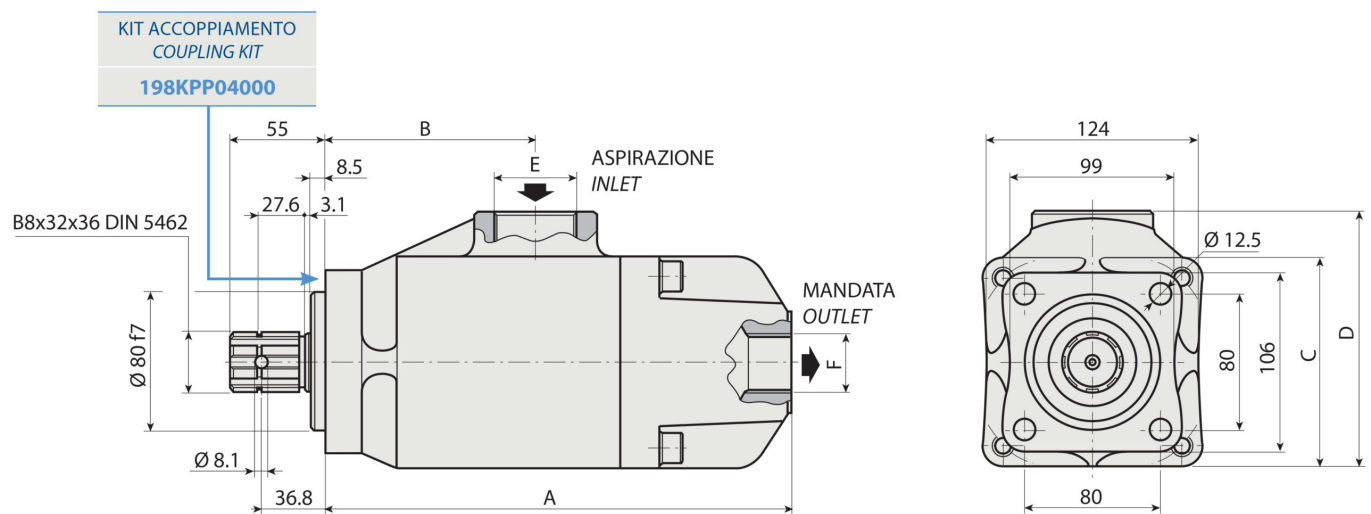

TYPE	CODE	DISPLAC cm ³	MAX CONTINUOUS OPERATING PRESSURE bar	MAX INTERMITT. OPERATING PRESSURE (MAX 30S) bar	MAX PEAK PRESSURE (P<= 0.1S) bar	MAX INTERMITTENT SPEED (P<=20 BAR) n/min r.p.m.	MAX CONTINUOUS SPEED (<=P1) n/min r.p.m.	MIN INTERMITTENT SPEED (<=P2X0.5) (MAX 30S) n/min r.p.m.
PE 70	201PE070ZSE	70	300	350	400	2000	1600	400
PE 80	201PE080ZSE	80	300	350	400	2000	1600	400
PE 90	201PE090ZSE	90	300	350	400	2000	1600	400
PE 100	201PE100ZSE	100	300	350	400	2000	1600	400